




ENGINEERED TO SERVE.



# PANTHER CHASSIS ↙

## EXTRAORDINARY VALUE WITHOUT COMPROMISE. ↙

The KME Panther offers an unbeatable combination of safety, ergonomics, reliability and maintenance. Available in multiple cab styles with seating up to 10 and engine horsepower options up to 525 hp, the Panther chassis offers a full range of options to accommodate your crew.

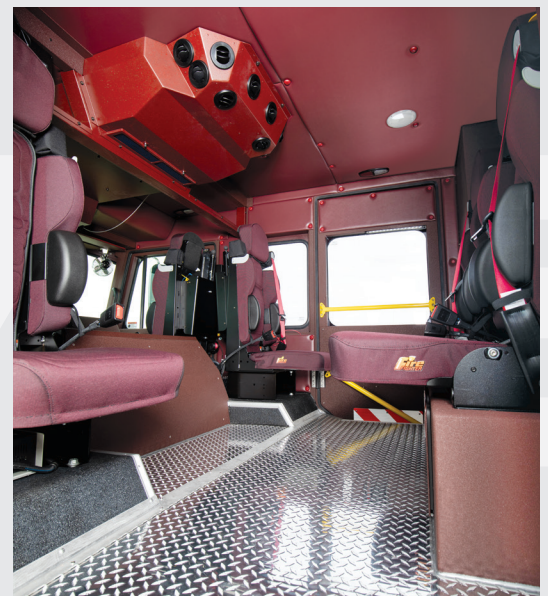


# PANTHER CHASSIS




## EXTRAORDINARY VALUE, SUPERIOR SAFETY.

### ROOF HEIGHT OPTIONS

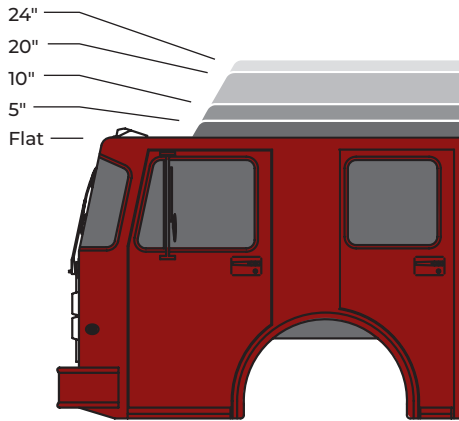

### CAB LENGTH AND SEATING CONFIGURATIONS

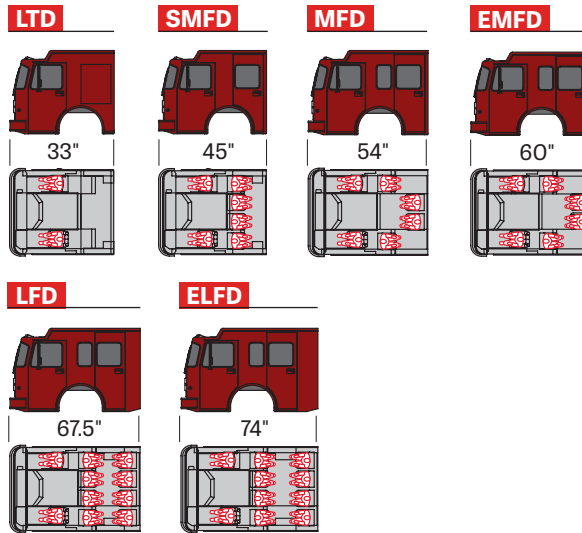

#### BEST-IN-CLASS SAFETY

Designed and purpose-built for firefighters, the KME Panther offers best-in-class apparatus safety with eight airbag positions that give your apparatus the highest available impact and anti-ejection protection available. Innovative seat belt systems and outboard sensors dramatically reduce restraint.



#### ENGINEERED FOR CUSTOM

The KME Panther is available in a variety of configurations that offer plenty of space with seating for up to ten firefighters. The raised roof extends over the driver and officer, making it easier to maneuver within the cab, and ergonomic controls help ensure safe and easy operation of the vehicle.



#### SAFE AND SPACIOUS CAB

KME provides the most spacious and ergonomic cabs in the industry with flat floors, low step heights and taller, wider cab doors. An optimized engine tunnel offers increased leg and hip room for the front seats, while giving more floor space to the rear crew.

### SPECIFICATIONS

ENGINE	CUMMINS DIESEL L9 OR X12
ENGINE HORSEPOWER	380-525 HP
TRANSMISSION	ALLISON 3000 EVS OR 4000 EVS (Retarder Available)
FRONT GAWR (lbs.)	18,000 / 20,000 / 21,500 / 22,000 / 22,800 / 23,000 / 24,000
REAR GAWR (lbs.)	24,000 / 27,000 / 31,000 / 31,500 / 40,000 / 44,000 / 48,000 / 52,000 / 54,000 / 58,000
AXLE CONFIGURATIONS	4X2, 6X4
FRONT AXLE	I BEAM, FABRICATED BEAM OR IFS
FRONT SUSPENSION	IFS OR LEAF SPRING
STEERING COLUMN/WHEEL	18" TILT / TELESCOPIC (2- or 4-Spoke, SMARTwheel Visibility Available)
FRONT AXLE TURNING RANGE	35°, 42°, 43°, 44°L / 42°R, 48°, 48°L / 44°R, 50°, 53° OR 53°L / 50°R
REAR AXLE	SINGLE OR TANDEM
REAR SUSPENSION	AIR, RUBBER OR SPRING
BRAKES	DISC OR DRUM
BRAKE SYSTEMS	ABS / ATC / RSC / ESC
WHEELBASE	136" - 303.5" (1/2" increments)
BUMPER EXTENSIONS	6" / 8" / 12.5" / 14" / 16" / 18" / 21" / 24" / 28" / 31"
BATTERIES	3 BCI OR 6 BCI GROUP 31
ALTERNATOR	270, 300, 320, 325, 360 OR 420 AMP
KEYLESS	START, ENTRY (touch pad)* AND ANTI THEFT*

\*Available Options

Technical specifications and descriptions are subject to change without notice. Content is limited and does not cover all available features. For additional information, please contact a KME Regional Sales Manager.



800-235-3928 | [KMEFIRE.COM](http://KMEFIRE.COM) |     

© 2023 REV Group, Inc. All Rights Reserved.