



# PREDATOR™ CHASSIS

## UNRIVALED PERFORMANCE

The KME Predator custom cab and chassis is built from the ground up to offer unmatched strength and performance. The spacious cab interior of the Predator provides maximum room for crew members, equipment and storage.




# PREDATOR™ CHASSIS




## FOUNDATION OF STRENGTH.

### ROOF HEIGHT OPTIONS

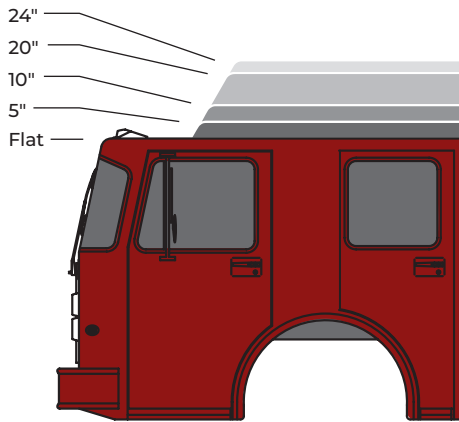

### 99\"-WIDE ALUMINUM CAB

### CAB LENGTH AND SEATING CONFIGURATIONS

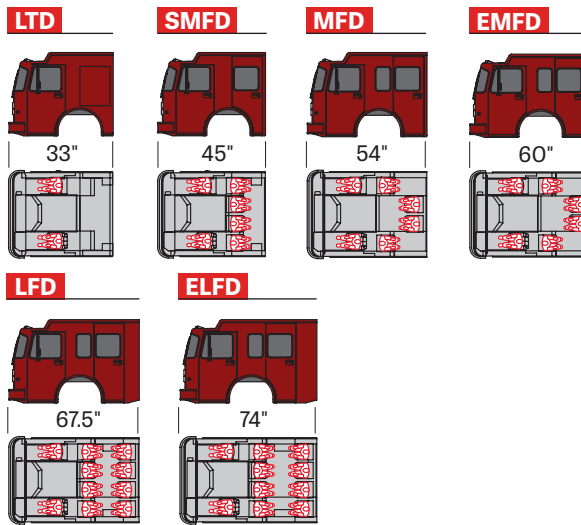

### SAFE AND SPACIOUS CAB

KME provides the most spacious and ergonomic cabs in the industry with flat floors, low step heights and taller, wider cab doors. An optimized engine tunnel offers increased leg and hip room for the front seats, while giving more floor space to the rear crew.



### ENGINEERED FOR CUSTOM

Custom isn't just about saying "yes," it's knowing that the result is engineered for reliable and long-lasting performance. With the most options available, our cabs are built to keep crews comfortable and safe while delivering the tightest turn radius on the market.



### PROVEN SAFETY AND STRENGTH

At KME, firefighter safety is our primary concern. KME's Advanced Protection System provides firefighters with best-in-class protection against frontal impact, rollover, side impact and occupant ejection to and from the scene. These systems are backed up by third-party testing to ensure cab safety from every perspective.

## SPECIFICATIONS

ENGINE	CUMMINS DIESEL L9, X12 OR X15
ENGINE HORSEPOWER	400-600 HP
TRANSMISSION	ALLISON GEN V 3000 OR 4000 EVS (Retarder Available)
APPARATUS TYPE	RESCUE, PUMPER, MID-MOUNT AERIAL, MID-MOUNT QUINT, REAR-MOUNT AERIAL, REAR-MOUNT QUINT, TANKER
FRONT GAWR (lbs.)	18,000 / 20,000 / 21,500 / 22,000 / 22,800 / 23,000 / 24,000
REAR GAWR (lbs.)	24,000 / 27,000 / 31,000 / 31,500 / 40,000 / 44,000 / 48,000 / 52,000 / 54,000 / 58,000 / 60,000 / 63,000
AXLE CONFIGURATIONS	4X2, 6X4
FRONT AXLE	I BEAM, STEERTEK™ OR IFS
FRONT SUSPENSION	IFS OR LEAF SPRING
STEERING COLUMN/WHEEL	18" TILT / TELESCOPIC (2- or 4-Spoke, SMARTwheel Visibility Available)
FRONT AXLE TURNING RANGE	35°, 42°, 43°, 44°L / 42°R, 48°, 48°L / 44°R, 50°, 53° OR 53°L / 50°R
REAR AXLE	SINGLE OR TANDEM
REAR SUSPENSION	AIR, RUBBER OR SPRING
BRAKES	DISC OR DRUM
BRAKE SYSTEMS	ABS / ATC / RSC / ESC
WHEELBASE	136" – 303.5" (1/2" increments)
BUMPER EXTENSIONS	6" / 8" / 12.5" / 14" / 16" / 18" / 21" / 24" / 28" / 31"
BATTERIES	3 BCI OR 6 BCI GROUP 31
ALTERNATOR	270, 300, 320, 325, 360 OR 420 AMP
KEYLESS	START, ENTRY (touch pad)* AND ANTI THEFT*

\*Available Options

Technical specifications and descriptions are subject to change without notice. Content is limited and does not cover all available features. For additional information, please contact a KME Regional Sales Manager.



800-235-3928 | KMEFIRE.COM |     

© 2023 REV Group, Inc. All Rights Reserved.