

AERIALS



ENGINEERED TO SERVE.



TUFF™ TRUCK

ZERO RESTRICTIONS MEAN 100% CONFIDENCE. ✓

Built to navigate around tight city streets, the KME Tuff Truck takes maximum drivability to a new level with an available 96" narrow cab and body width and 227" wheelbase. The addition of Steertek™ NXT provides a 31'-7" curb-to-curb turning radius deliver better maneuverability around cul-de-sacs and roundabouts.

Designed with two sets of H-style stabilizers—which fully extended measure only 12"—Tuff Truck can be positioned on an 11-degree slope for unrivaled performance.

The Tuff Truck also has an increased water capacity of up to 650 gallons and 240 cubic feet of body capacity for enhanced firefighting capability.



FEATURES 25" DEEP COMPARTMENTS AND UP TO 249 CUBIC FEET OF BODY CAPACITY, PLUS WIDE COMPARTMENTS FRONT AND REAR TO ALLOW FOR VENTILATION EQUIPMENT STORAGE.



KMEFIRE.COM




OPERATE IN FULL RANGE OF MOTION
WITH ZERO RESTRICTIONS.



Short outrigger stance allows for setup on the tightest streets.



Safe egress from the turntable on each side of the body.

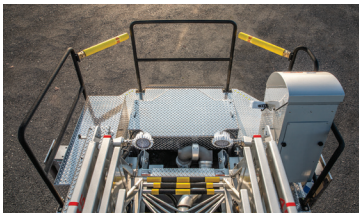

Large, safe working area on the turntable.



Advanced motion control system provides the smoothest device operation.

SPECIFICATIONS

CHASSIS TYPE	PANTHER, PREDATOR®, SSX™ SEVERE SERVICE, FC-94
VERTICAL REACH	103'
HORIZONTAL REACH	94'
OPERATING RANGE	-7° TO 80°
TIP LOAD WITH WATER	500 LBS. — 1,500 GPM FLOWING
TIP LOAD WITHOUT WATER	500 LBS.
WIND AND ICE RATING	50 MPH WIND AND 1/4" ON ENTIRE STRUCTURE
WATER FLOW	1,500 GPM
STABILIZER STYLE	H-STYLE
STABILIZER STANCE	12'
REAR AXLE	TANDEM
TANK CAPACITIES	UP TO 650 GALLONS
PUMP BRANDS	WATEROUS, HALE OR DARLEY®
HOSEBED CAPACITY	UP TO 1,000' OF 5" HOSE
LADDER COMPLEMENT	NFPA OR ISO COMPLEMENT
LADDER WARRANTY	20-YEAR STRUCTURAL

CUSTOM OPTIONS

Pump:
Available with or without

Hydraulics:
Straight or advanced

Body:
96" or 100" wide

