


Noblesville (IN) Fire Department Severe Service Pumper

GSO 11535

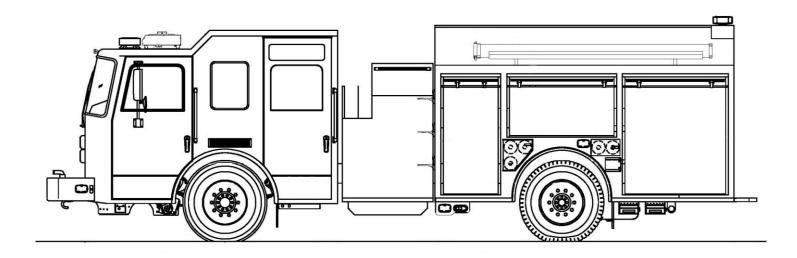

CHASSIS

- KME Severe Service XMFD four-door cab with 10-inch raised roof
- 96-inch-wide cab and body
- Cummins L9 450 HP engine, 1,250 ft-lb torque/Allison 3000 EVS transmission
- 110,000 PSI frame rails
- 20,000-pound Hendrickson STEERTEK from axle/ suspension
- 24,000-pound Meritor rear axle with spring suspension
- Bostrom ABTS seating for six
- 65-gallon fuel tank with
 standard stainless steel straps

BODY FEATURES

- 3/16-inch aluminum formed body
- Full-height compartments on driver's side
- Low side compartments with high-rise pack storage on officer's side
- Lowered hosebed
- Zico power ladder rack

ELECTRIC & WARNING

- HiViz brow light
- Whelen warning light package, electronic siren and Howler
- Federal Q2B siren
- ROM dual-color compartment lights

PUMP & PLUMBING

- 750-gallon poly water tank
- Hale QMAX 1,500 GPM singlestage pump
- Trident air primer
- Three (3) 2-1/2" pump panel discharges
- (1) 3" pump panel discharge
- (2) 2-1/2" rear of body discharges
- (2) 1-3/4" lowered crosslays
- Deck gun
- FRC TGA-400 In-Control pressure governor

