




ASHEVILLE (NC)

TRACTOR DRAWN RESCUE

Truck # 11463

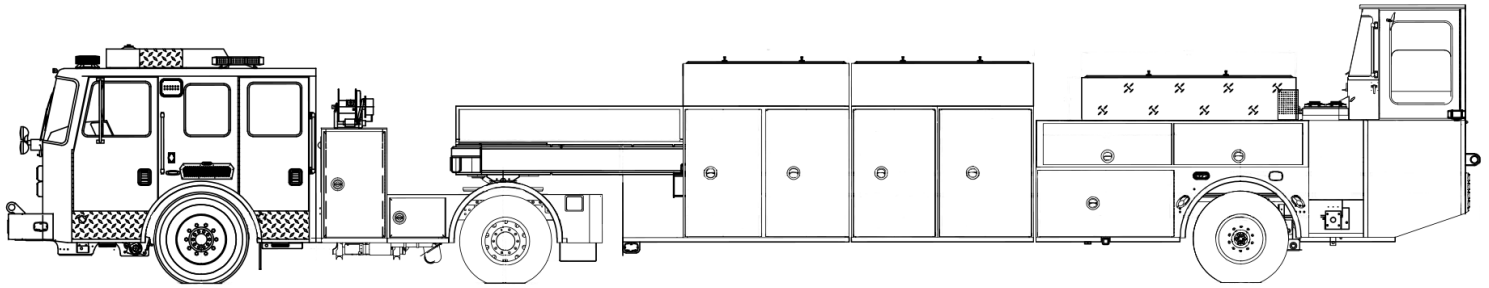

CHASSIS

- KME Severe Service MFD 96"-wide cab with flat roof
- Cummins X12 engine, 500HP; Allison 4000 EVS transmission
- Bostrom seating for (6)
- 110,000 PSI double frame rail
- Hendrickson STEERTEK NXT 20,000-pound front axle and suspension
- Meritor rear axle with 31,000-pound Hendrickson FIREMAAX EX suspension
- Hendrickson STEERTEK NXT 23,000-pound front axle and suspension tiller axle
- 130" overall height
- 57' 2" overall length
- 142" tractor wheelbase; 343" trailer wheelbase

BODY FEATURES

- 1/8" aluminum body
- Upper and lower transverse compartments
- (4) SCBA cylinder compartments in fender area
- Individual compartment at center rear of trailer is 24 inches deep
- Tiller cab with Bostrom Sierra seat and sliding doors
- Rear ladder tunnel storage
- Tapered rear of trailer for increased angle of departure
- Five 20"-deep compartments on top of body

ELECTRIC & WARNING


- Roto-Ray LED rotating light and dual Mars lights on front of cab
- Whelen warning light system
- HiViz FireTech brow and scene lights
- Hannay electric cord reel on top of driver side and officer side locker compartments
- Harrison 10KW hydraulic generator



MORNINGSIDE (MD)

SEVERE SERVICE PUMPER

Truck # 11494

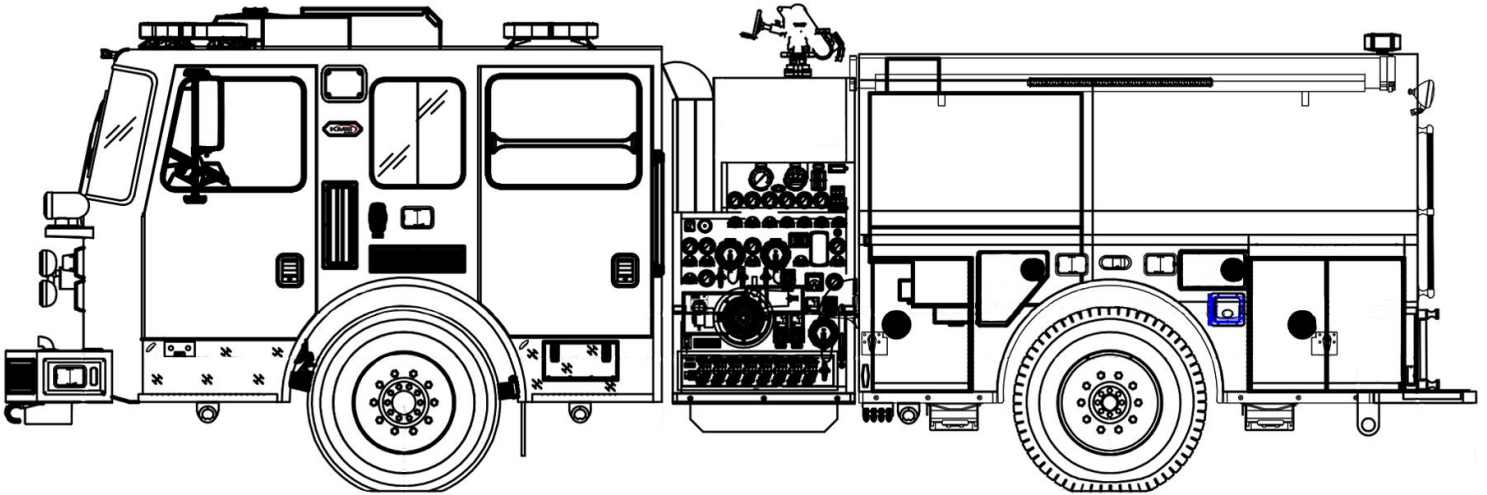

CHASSIS

- KME Severe Service XMFD with flat roof
- Cummins X12 engine, 500HP; Allison 4000 EVS transmission
- USSC Valor seating for (6) firefighters
- 110,000 PSI galvanized double frame rail
- Hendrickson STEERTEK 24,000-pound front axle and suspension
- Hendrickson FIREMAAX EX 24,000-pound air ride rear suspension
- 112" overall height
- 28' 4" overall length
- 163" wheelbase

BODY FEATURES








- (10) SCBA cylinder compartments in fender area
- Flex 304L stainless steel
- Ultra-low hose bed with T style water tank
- Officer side aluminum ladder mounting brackets

PUMP & PLUMBING

- HALE DSD 1250 GPM single stage pump
- 500-gallon water tank
- TFT deck gun
- Akron electric valves

ELECTRIC & WARNING

- Roto-Ray LED rotating light mounted on front of cab
- Whelen warning light system
- HiViz Firetech brow and scene lights
- Hannay booster reel
- Unity spotlights on rear body stanchions

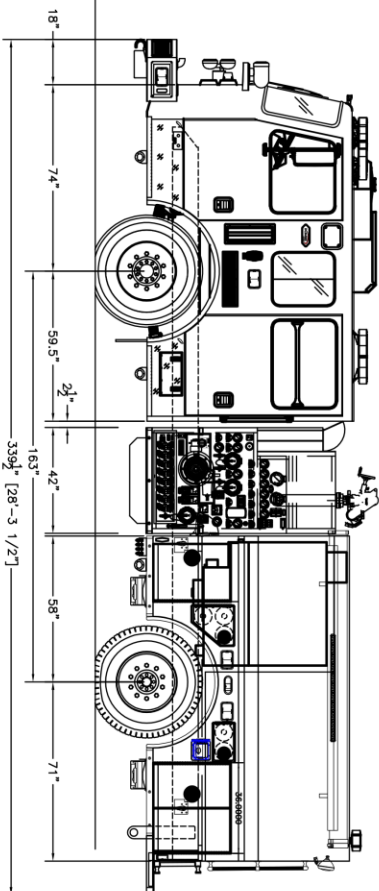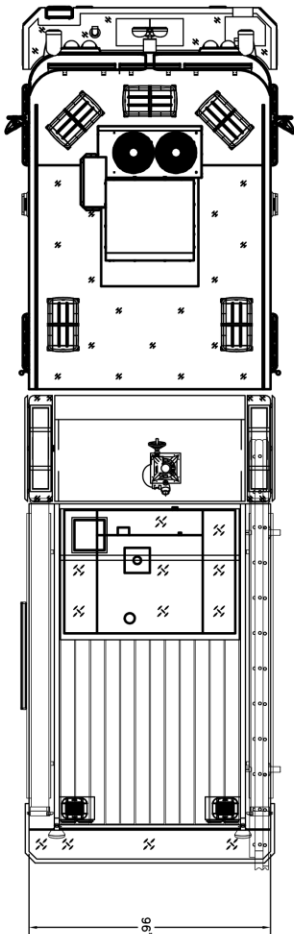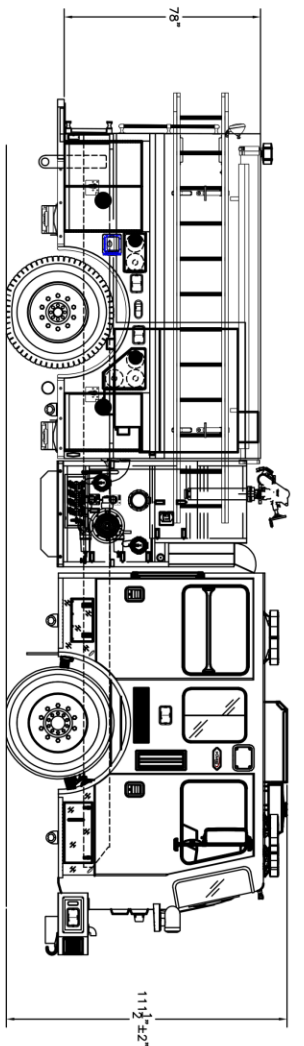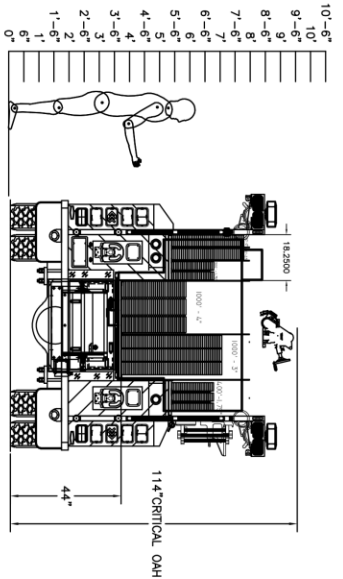

KME SEVERE SERVICE
96" W SEVERE SERVICE XMFD FLAT ROOF
AXLES: 24,000# FRONT/24,000# REAR
PUMP: HALE DSD 1250 GPM SINGLE STAGE
WATER TANK: 500 GALLONS POLY
BODY TYPE: 129" FLEX 304L STAINLESS STEEL

THIS DRAWING IS A GENERAL
CONVEYANCE OF THE
APPROXIMATE LAYOUT
AND MAY NOT
NECESSARILY BE
CONSIDERED A
CONTRACT. SPECIFICATIONS SHALL
PREVAIL OVER DRAWING.

CUSTOMER APPROVAL:

NAME:

TITLE:

DATE:

REV C

DATE

DATE

UPDATED TO PER AND CHANGE ORDERS

DATE

DATE

JAE

DATE

DATE

SCALE

DATE

DATE

B

DATE

DATE

APPROVED BY

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE


DATE



MACOMB TOWNSHIP (MI)

SEVERE SERVICE PUMPER

Truck # 11749-50

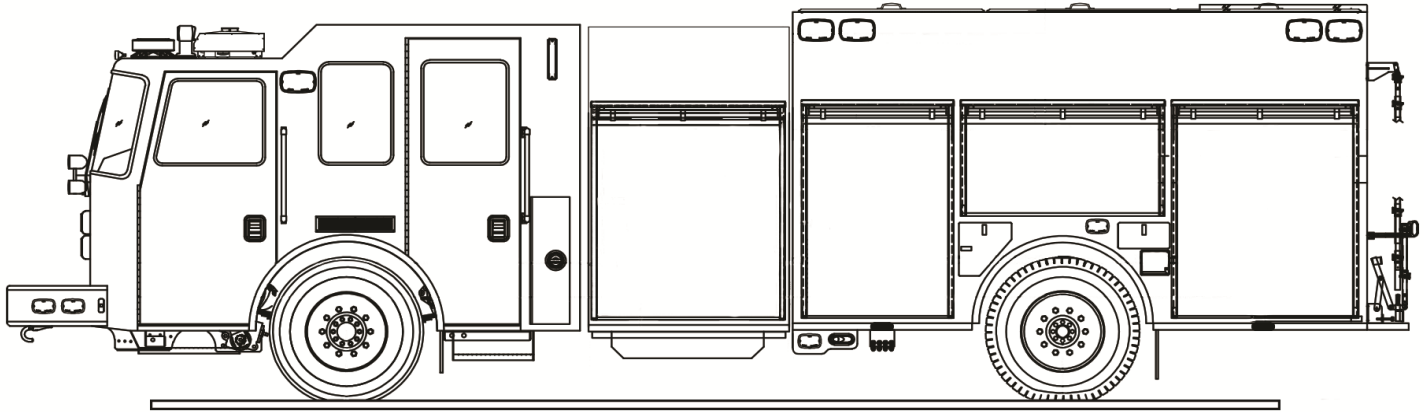

CHASSIS

- KME Severe Service LFD with 10" raised roof
- Cummins L9 engine, 450HP; Allison 3000 EVS transmission
- Bostrom seating for (4) firefighters
- 110,000 PSI galvanized double frame rail
- Hendrickson STEERTEK 22,000-pound front axle and suspension
- Hendrickson FIREMAAX EX 24,000-pound air ride rear suspension
- 4Front Frontal Impact air bags
- RollTek rollover occupant protection system
- 118" overall height
- 33' 9" overall length
- 207" wheelbase

kmefire.com

BODY FEATURES






- (11) SCBA cylinder compartments in fender area
- FLEX 3/16" aluminum body
- Zico roof access ladder on driver side apparatus rear
- Ladder storage tunnel on apparatus rear next to water tank
- Transverse rear cab compartment with access doors inside and outside of cab.
- 29"-wide full depth coffin compartments on top of the body driver side

ELECTRIC & WARNING

- Roto-Ray LED rotating light mounted on front cab
- Whelen warning light system
- Whelen Pioneer brow and scene lights
- 6KW hydraulic generator

PUMP & PLUMBING

- HALE QMAX-XS 1500 GPM single stage pump
- Fully enclosed pump module
- 750-gallon water tank
- 30-gallon foam tank
- Hale Smart Foam system
- TFT deck gun

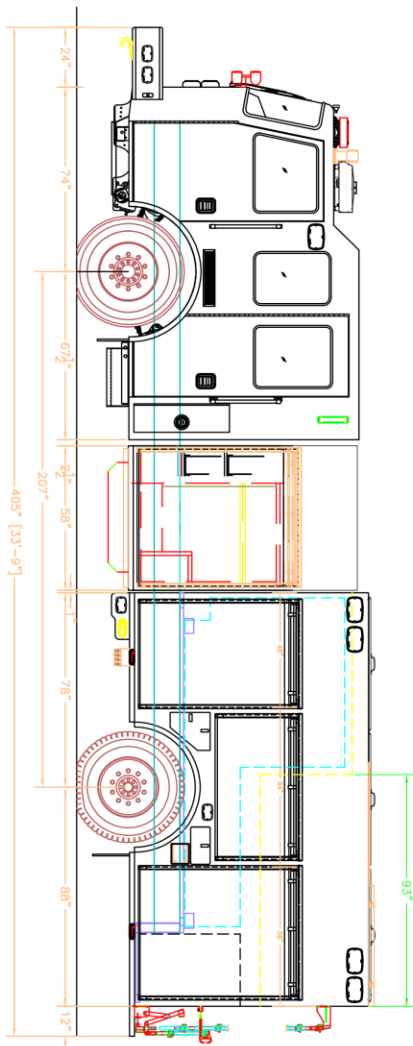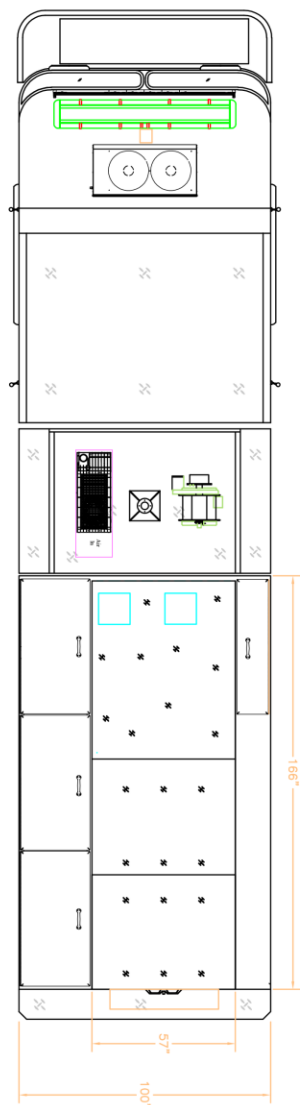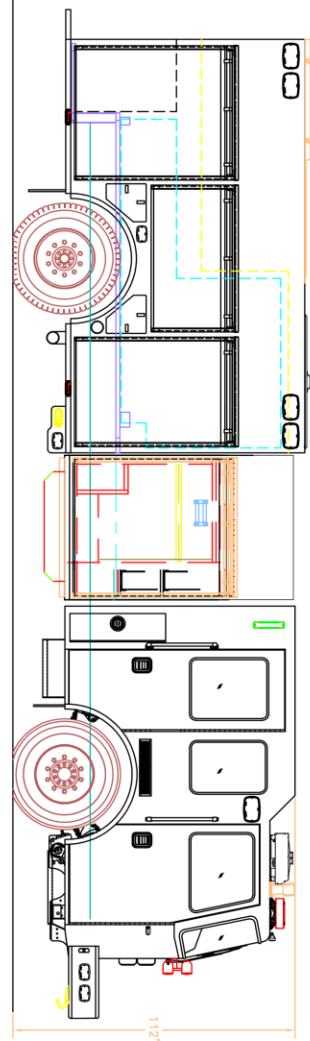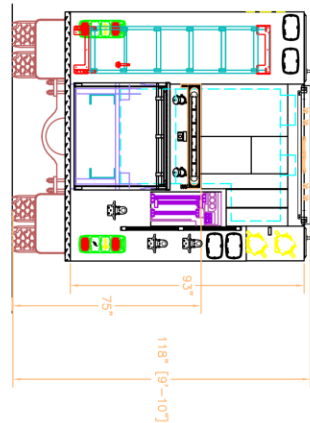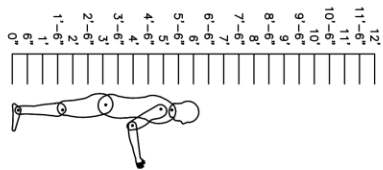

CAB: 100" W KME SEVERE SERVICE LTD 10" RR
ENGINE & TRANS: CUMMINS 19 450 HP/ALLISON 3000 EVS
AXLES: 22,000# FRONT/24,000# REAR
PUMP: HALE QMAX-XS-150 1500 GPM SINGLE STAGE PUMP
WATER TANK: 750 GALLONS POLY - 30 FOAM
BODY TYPE: FLEX 166" 3/16" ALUMINUM
FOAM SYSTEM: HALE SMART FOAM 2.1

THIS DRAWING IS A GENERAL
CONTRACTUAL REQUIREMENTS.
NECESSARILY REFLECT ALL
PORTAL, OTHER DRAWING.

CUSTOMER APPROVAL:

NAME:	
TITLE:	
DATE:	

SYN	DATE	REVISION DESCRIPTION	APP'D
A	02/27/23	PPR UPDATE	ZCZ

SALES ENGINEER : ZACK SCHUNK	
ENGINEERING ARE APPROXIMATE & MAY VARY DUE TO BUILD ADJUSTMENTS	
SCALE	DATE
1" = 16'	4/14/2022
BY	APPROVED BY
NOTE	

KME
KME GROUP
KME INDUSTRIAL COMPANY - INSURING, PA 18840