
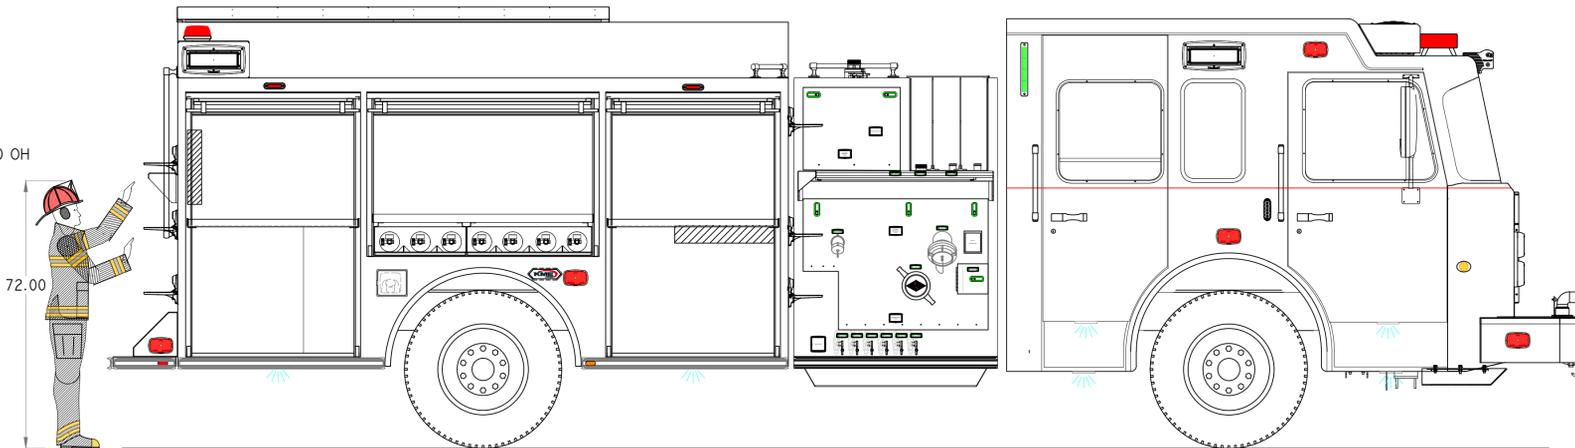
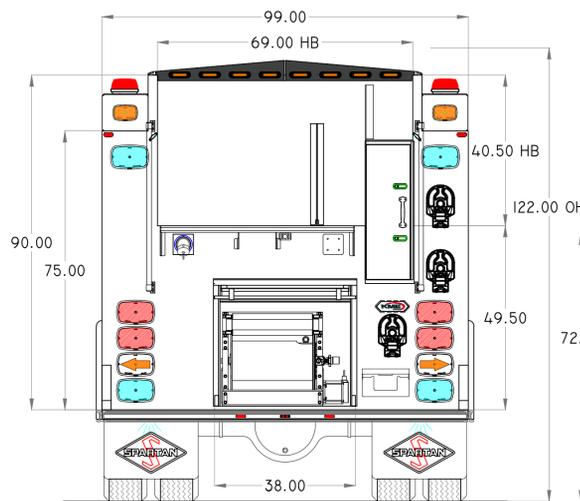
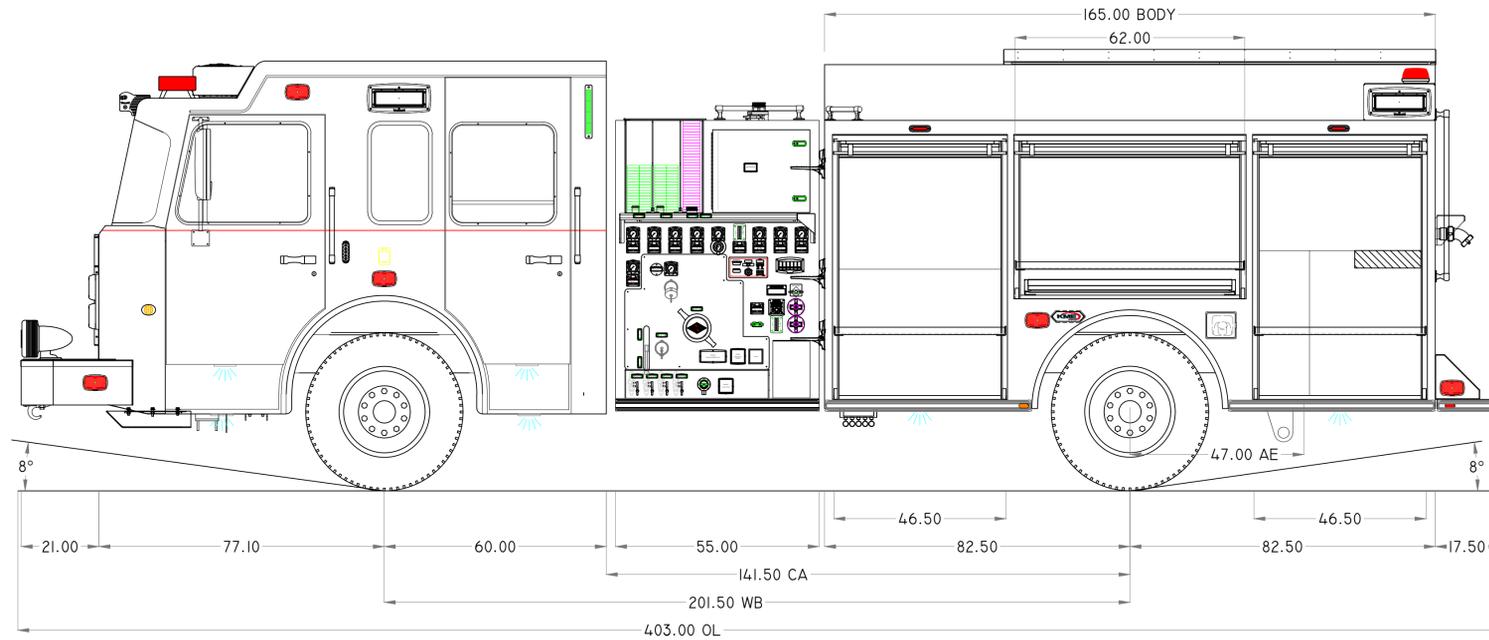
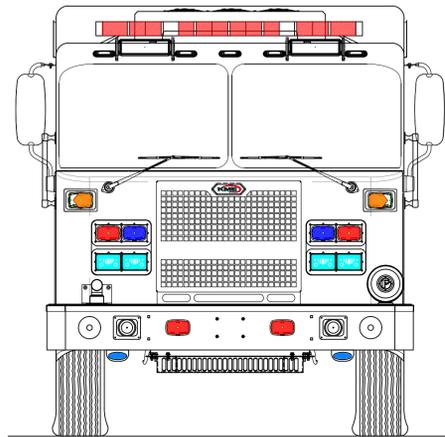


*** OPTIONAL CONTENT NOT SHOWN ***
 REFER TO QUOTEWRITER SPECIFICATIONS
 FOR FULL OPTION CONTENT

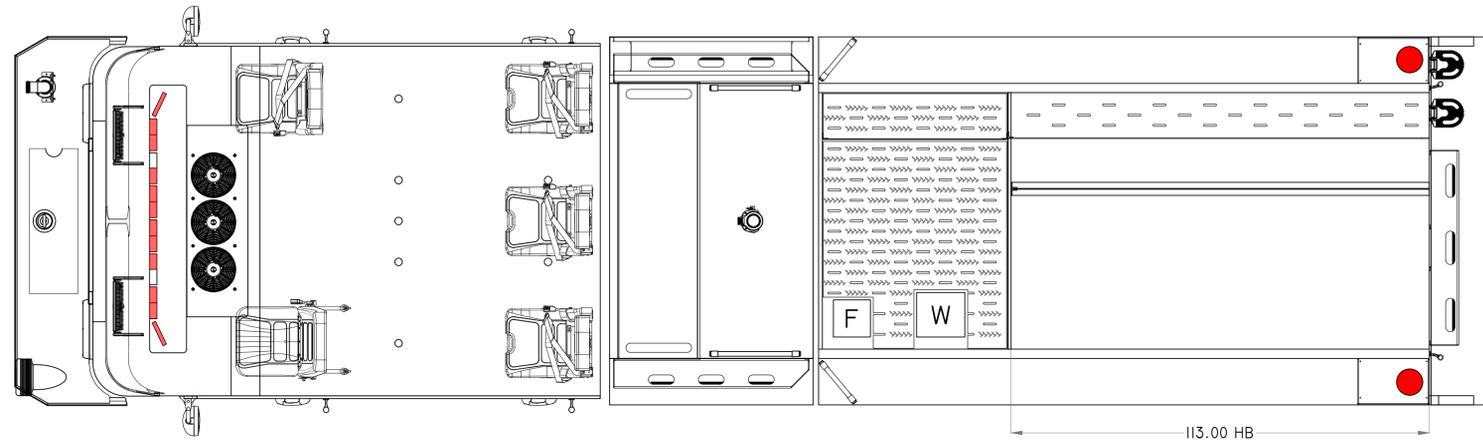

CHASSIS: PANTHER EMFD
 AXLES: 22,800# FRONT / 27,000# REAR
 ENGINE: CUMMINS X12 500 HP / ALLISON 4000 EVS
 BODY: ALUMINUM
 GENERATOR: N/A
 PUMP: WATEROUS CSU 2000 GPM - DE-RATED TO 1500 GPM
 TANK: POLY 750 GAL. WATER/ 20 GAL. FOAM
 FOAM: FOAMPRO 1600

THIS DRAWING IS A GENERAL CONFIGURATION AND MAY NOT NECESSARILY REFLECT ALL CONTRACTUAL REQUIREMENTS. CONTRACT SPECIFICATIONS SHALL PREVAIL OVER DRAWING.

CUSTOMER APPROVAL:
 NAME: _____
 TITLE: _____
 DATE: _____

SYM	DATE	REVISION DESCRIPTION	APP'D
B	9/26/25	UPDATE TITLE BLOCK	JM
A	5/15/24	LAYOUT	JM/NS/AN

SALES ENGINEER : TBD

KME
 REV GROUP
 KME
 ONE INDUSTRIAL COMPLEX - NESQUEHONING, PA 18240

DIMENSIONS ARE APPROXIMATE & MAY VARY DUE TO BUILD ADJUSTMENTS

SCALE	DWG SIZE	DRAWN BY	DATE
	D	JM	5/15/2024

APPROVED BY: _____

MODEL 4114

000000