

HOSEBED DIVIDERS: HOSE LOAD:

THREE (3)
DS OUTBOARD 100' OF 1-1/2"
DS INBOARD 800' OF 3"
OS INBOARD 600' OF 3"
OS OUTBOARD 400' OF 1-3/4"

GENERATOR: N/A FOAM SYSTEM: FOAMPRO 2000

MISC.

DATE:

THIS DRAWING IS A GENERAL CONFIGURATION AND MAY NOT NECESSARILY REFLECT ALL CONTRACTUAL REQUIREMENTS. CONTRACT SPECIFICATIONS SHALL PREVAIL OVER DRAWING

NAME: TITLE:

CUSTOMER APPROVAL:

BODY TYPE:
MATERIAL:

140" FLEX 12 GA GALVANEAL

BODY ----


FILLS:


POLY 600 GALLONS 20 GALLONS DS PUMP PANEL N/A

1

TANK -----

COMPARTMENTATION
DRIVER SIDE: FULL HEIGHT
OFFICER SIDE: FULL HEIGHT/SPLIT DEPTH

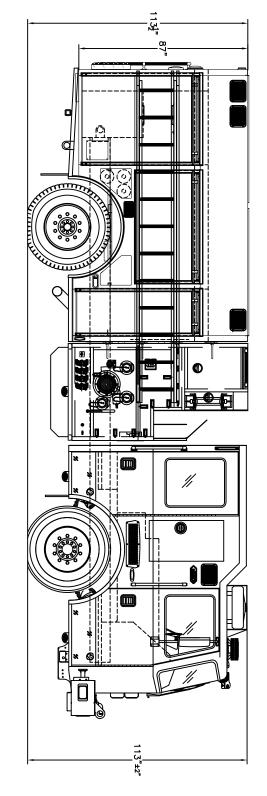

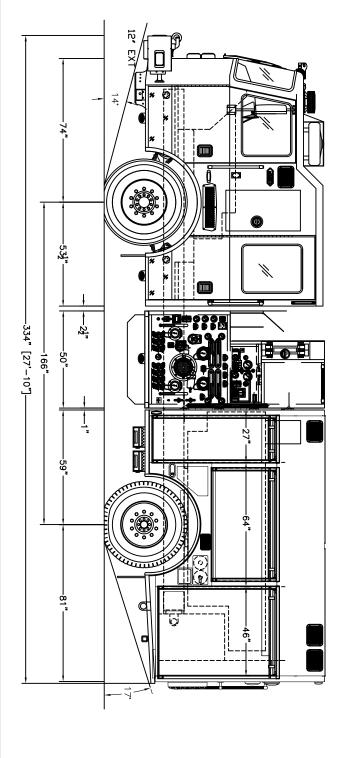

SALES ENGINEER : MARK P. HIGGINS

REVISION DESCRIPTION

APP'D HAW 02/11/16 CAB SCENE LIGHT RELOCATION

MPH

12/28/15

REVISED

KOVATCH MOBILE EQUIPMENT
ONE INDUSTRIAL COMPLEX - NESQUEHONING, PA 18240

NSIDNS ARE APPRIDIXIMATE & MAY VARY DUE TO BUILD ADJUSTMENTS
DATE SCALE DVG SIZE DRAVN BY JJM

/28/2015 1"=24" D APPRIDVED BY

02/26/2015 KME CUSTOM PUMPER

PLACER HILLS FPD

GSO#10077

CHASSIS: 100"W KME SEVERE SERVICE 4X2 CAB: MFD WITH 10" RAISED ROOF ENGINE: CUMMINS ISL9 450 HP TRANSMISSION: ALLISON 3000EVS FRONT AXLE: 19,450 LB REAR AXLE: 24,000 LB CHASSIS

INTAKES

DRIVER SIDE: 6" & 2-1/2"

OFFICER SIDE: 6" & 2-1/2"

FRONT: N/A

REAR: N/A

PUMP: HALE QMAX-150 1500 GPM SINGLE STAGE

PUMP

REAR: DECK GUN: OTHER:

E: (2) 2-1/2"
E: (2) 2-1/2"
(1) 1-1/2"
OS REAR
(1) 2 1/2" OS REAR
(1) 3" CENTER DUNNAGE AREA
(1) 1 1/2" DS FRONT HOSE BED
(2) 1 3/4" CROSSLAYS

DISCHARGES
DRIVER SIDE: (
OFFICER SIDE: (
FRONT: (